


ZONELINE® QUIET FEATURES AVAILABLE ON ALL MODELS




BAKED-ON MASTIC SOUND BARRIER

A heavy-duty barrier covers the back of the unit for superior sound insulation.

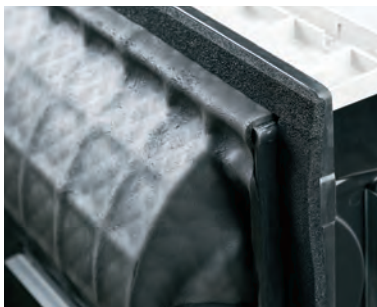

BLOWER & DC MOTORS

A large cross-flow blower and two DC fan motors keep the unit quiet for customers & guests while providing smart fan cooling & heating performance.

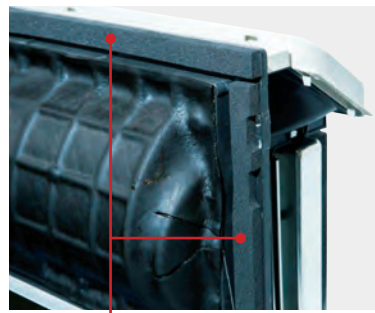

WEATHER BARRIER SYSTEM SEAL

A seal around the perimeter of the units keeps noise and dirt outside.

ZONELINE® STANDARD FEATURES AVAILABLE ON ALL MODELS



SYSTEM COMPATIBILITY

Compatible with a wide variety of thermostats and energy management systems, including central desk control.




EFFICIENT HEAT PUMP

Exclusive Reverse Cycle Defrost increases efficiency and allows unit to run in heat pump mode longer. Backup resistance heat provides comfort during severe cold temperatures. Available on all heat pump models.



ELECTRONIC TOUCH CONTROLS

Easy-to-use controls with clear LED readout provide a user-friendly experience.

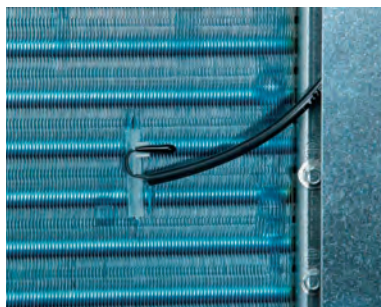

HEAT & FREEZE SENTINEL

Keeps room from overheating or freezing while meeting guest comfort and protecting against damage.



BASE PAN

Made of sheet-molding compound (SMC) & durable resin, the base pan resists rust.



ELECTRONIC TEMPERATURE LIMITING

Prevents expensive overcooling and overheating of rooms. Limits are factory set for savings, but can be adjusted to meet specific needs.



CORROSION PROTECTION*

Double-coated painted surfaces and stainless steel components ensure lasting performance in challenging environments such as oceanfront properties.




MAKEUP AIR*

A secondary system provides continuous outdoor air. The supplemental dehumidification system operates when outdoor temperatures are above 50 degrees F and when relative humidity levels rise above 55%. Available on select models.



DRY AIR 25*

Zoneline Dry Air models remove 20%-35% more moisture from the air than standard Zoneline air conditioners,** making them perfect for high humidity climates.

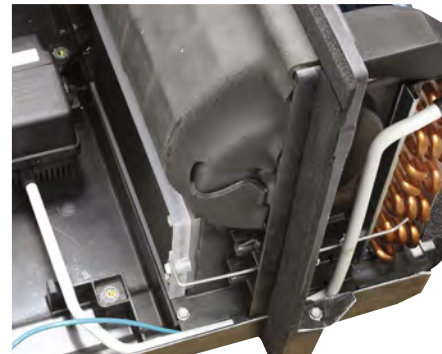

INTERNAL CONDENSATE REMOVAL (ICR)*

A system that minimizes the amount of condensate draining from the unit when in heat pump mode.

*Available on select models.

**Varies when comparing dehumidification rates of the 7,000/9,000/12,000 BTU base models to Dry Air model counterparts. AZ45 Series electric resistance models only.

ELECTRICAL CONNECTION/SUB-BASE

GE ZONELINE SPECIFICATION — RESISTANCE HEATER WATTAGE

The correct kit for the installation is determined by the voltage and amperage of the electrical circuit and the means of connecting the unit to the building wiring. If the unit is to be plugged into a receptacle, a line cord kit would be used; if the unit is to be permanently connected, a direct connect or permanent connection kit would be used. Cord set units of 265 volts must be installed in compliance with National Electrical Code. (Article 440.60)

POWER CONNECTION KITS

Required on all models. See specification information below for heater kWh and branch circuit ampacity.

GE Zoneline offers short and long power cords, direct connect universal supply kits and sub bases. Power connection kits are required for all models. See pages 11 and 12 for all product options.

Receptacles/Sub-bases



Tandem
230/208V 15 Amp
NEMA6-15R



Perpendicular
230/208V 20 Amp
NEMA6-20R



Large tandem
230/208V 30 Amp
NEMA6-30R



265V 15 amp
NEMA7-15R;
receptacle used on
265V sub-base



265V 20 amp
NEMA7-20R;
receptacle used on
265V sub-base



265V 30 amp
NEMA7-30R;
receptacle used on
265V sub-base

GE ZONELINE SPECIFICATIONS—RESISTANCE HEATER WATTAGE

BTUh size	230/208-Volt Line-Cord Connected (P) and Direct Connected Units (D)					
	7,000/9,000			12,000/15,000		
Power connection kit	RAK315P & RAK315D**	RAK320P & RAK320D**	RAK330P & RAK330D**	RAK315P & RAK315D**	RAK320P & RAK320D**	RAK330P & RAK330D**
Total watts	2,410/1,990	3,420/2,830	4,830/3,990*	2,430/2,020	3,450/2,860	4,860/4,020*
Heater watts	2,400/1,960	3,400/2,780	4,800/3,930*	2,400/1,960	3,400/2,780	4,800/3,930*
Heater BTUh	8,100/6,600	11,600/9,400	16,300/13,400*	8,100/6,600	11,600/9,400	16,300/13,400*
Total amps	10.5/9.6	14.9/13.6	21.0/19.2	10.6/9.7	15.1/13.8	21.2/19.3
MCA	15	20	25	15	20	25
Recommended protective device (MOCP)	15 amp time-delay fuse or breaker	20 amp time-delay fuse or breaker	30 amp time-delay fuse or breaker	15 amp time-delay fuse or breaker	20 amp time-delay fuse or breaker	30 amp time-delay fuse or breaker

BTUh size	265-Volt Permanent (P, Cord Set) and Direct-Connected Units (D)					
	7,000/9,000			12,000/15,000		
Power connection kit	RAK515P & RAK515D	RAK520P & RAK520D	RAK530P & RAK530D	RAK515P & RAK515D	RAK520P & RAK520D	RAK530P & RAK530D
Total watts	2,440	3,450	4,850*	2,460	3,470	4,870*
Heater watts	2,400	3,400	4,800*	2,400	3,400	4,800*
Heater BTUh	8,100	11,600	16,300*	8,100	11,600	16,300*
Total amps	9.1	12.9	18.1	9.3	13.1	18.4
MCA	15	20	25	15	20	25
Recommended protective device (MOCP)	15 amp time-delay fuse or breaker	20 amp time-delay fuse or breaker	25 amp time-delay fuse or breaker	15 amp time-delay fuse or breaker	20 amp time-delay fuse or breaker	25 amp time-delay fuse or breaker

Each line cord kit has an integral Leakage Current Detection and Interruption (LCDI) device as required by National Electrical Code (NEC) and Underwriters Laboratories (UL) for units manufactured after August 1, 2004.

Specifications subject to change.

Total watts and total amps include electric heat and fan motor(s).

RAK515P, RAK520P and RAK530P are only to be used with a sub-base.

*30 AMP heater wattage will be reduced in low fan operation.

**Direct connect kits require the purchase of the RAK4002D junction box.

ZONELINE® WALL SLEEVE ACCESSORIES (COLOR MATCHED FOR AZ45-65 SERIES)

DELIVERING RELIABLE COMFORT.

Only genuine parts and accessories from GE Appliances keep your Zoneline® units running in peak condition.

Engineered and constructed from high-quality materials for a guaranteed fit, convenient replacement and constant comfort.



RAB78B

4 PIECE QUICK SNAP DESIGN SMC SLEEVE 42" EXTENDED DEPTH

- Stainless steel locking components
- Fiberglass reinforced polyester compound
- Color matched and standard size
- Insulated top and sides



RAB81

QUICK SNAP WALL SLEEVE

- Universal design
- Insulated top & sides
- Heavy gauge metal
- Color matched
- 4-piece "quick snap" design
- Ships flat (3" H x 15" D x 45.5" L) assembled in field



RAB8116B

QUICK SNAP WALL SLEEVE 16" EXTENDED DEPTH


Other extended depths available:

RAB8118B: Quick Snap Wall Sleeve 18" extended depth

RAB8120B: Quick Snap Wall Sleeve 20" extended depth

RAB8124B: Quick Snap Wall Sleeve 24" extended depth

ZONELINE® OUTDOOR GRILLE ACCESSORIES (FOR AZ SERIES)




RAK40 AIR DEFLECTOR KIT

- Adapts AZ chassis for use with other non-GE architectural grilles
- Aluminum deflector installed to condenser end sheet flanges to prevent condenser airflow recirculation




RAG61/62/63 ARCHITECTURAL REAR GRILLE

- Improves appearance and protection
- Molded of high-impact polycarbonate
- Slightly textured, colorfast surface blends with most walls
RAG61: Beige | RAG62: Maple | RAG63: Dark Brown

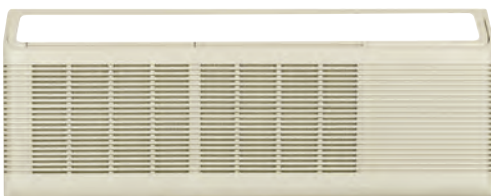


WP71X20960 REPLACEMENT ROOM CABINET

- Wraparound design with textured finish
- Injection-molded with high-impact polystyrene
- Fastens to chassis without tools or hardware
- Includes slide-out filters for AZ45/65 series
- Available through geapplianceparts.com

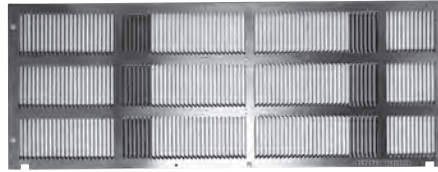


RAG60 STAMPED ALUMINUM EXTERIOR REAR GRILLE

- Optimizes air flow
- Made of durable aluminum

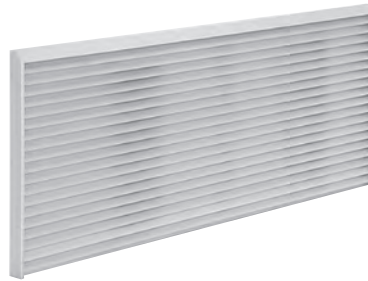

RAG67 ALUMINUM ARCHITECTURAL OUTDOOR GRILLE

- Extruded aluminum outdoor grille
- Grilles are paintable to match building décor

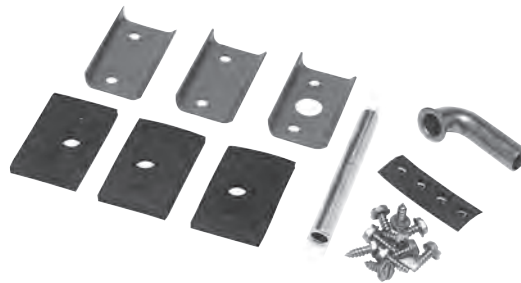

RAD10 (ALL ZONELINE SERIES)

INTERNAL/EXTERNAL DRAIN KIT

- Provides positive control of condensate water
- Routes condensate to exterior or interior of the building
- Suitable provision (field applied) required for connection to drain system
- 1/2" OD copper assemblies
- Includes short right-angle tube and 3"-long straight tube



RAK44 (5 Pack)

PTAC CURTAIN GUARD

- Durable polycarbonate
- UV Resistant
- 125 degrees air deflection angle
- Easy to install with no tools needed
- Attaches with pressure sensitive adhesive



RAK6053 (New Installations)

DUCT ADAPTER

- For use with new ducted installations
- Allows Zoneline unit to heat or cool an adjacent room
- Attaches to top of wall case
- Can direct air to the left or right side of adapter with RAK601B extension



RAK7023

**DUCT TRANSITION FOR REPLACEMENT
OF EXISTING ZONELINES
7-3/32" H x 6-1/2" W DUCTWORK**

- Allows existing duct adapter and extension to be used without requiring relocation of wall hole



RAK7013

**DUCT ADAPTER FOR NEW UNITS WITH OLD DUCTWORK
THAT MEASURES 8-3/8" H x 6-1/2" W**

- For use with existing ducted installations where ductwork dimensions match those shown about (prior to 1998)
- Allows existing duct extension to be used without requiring relocation of wall hole
- **Must use discharge grille, end plate and extension mounting hardware from old duct adapter**




RAK601B (Includes one RAK602B)

DUCT EXTENSION, REGISTER & TRIM FLANGE

- 44" long
- Includes air register and trim flange (RAK602B) for secondary space
- Additional air register and trim flange can be ordered separately if two extensions are made
- For use with RAK6053

ZONELINE® ACCESSORIES (FOR AZ45-65 SERIES)

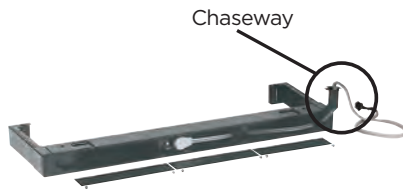

RAK204D*

230/208 SUB-BASES WITH POWER CORD INCLUDED

- Made of heavy-gauge steel
- Full base enclosure with adjustable side channels
- 4-point leveling legs
- Sub-base adapts to service conduit, circuit breakers and receptacles up to 30 amps

Kit No.	Sub-Base	Circuit Ampacity	Chaseway	Power Cord
RAK204D15C	Sub-Base 230V/208V	15	Included	Included
RAK204D20C	Sub-Base 230V/208V	20	Included	Included
RAK204D30C	Sub-Base 230V/208V	30	Included	Included

*Requires the purchase of the RAK4002D Junction box




RAK204E

265V SUB-BASES WITH POWER CORD INCLUDED

- Made of heavy-gauge steel
- Full base enclosure with adjustable side channels
- 4-point leveling legs
- Sub-base adapts to service conduit, circuit breakers and receptacles up to 30 amps

Kit No.	Sub-Base	Circuit Ampacity	Chaseway	Power Cord
RAK204E15C	Sub-Base 265 V	15	Included	Included
RAK204E20C	Sub-Base 265 V	20	Included	Included
RAK204E30C	Sub-Base 265 V	30	Included	Included

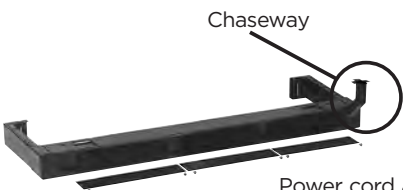

Power cord and junction box not included with sub-base.

RAK204U

SUB-BASES

- Made of heavy-gauge steel
- Full base enclosure with breakaway side channels
- 4-point leveling legs
- Used as a non-electrical sub-base to support the unit

Kit No.	Sub-Base	Circuit Ampacity	Chaseway	Power Cord
RAK204U	Standard	N/A	Included	Not Included



RAK205CW

CHASEWAY

- For wiring containment between junction box on chassis and RAK204U sub-base

Available while quantities last



RAK204SW

DISCONNECT SWITCH FOR USE IN SUB-BASE

- Fits directly into sub-base
- Comes with switch pre-mounted in replacement plate and wiring shown.
- DPST switch rated for use in 230/208 volt and 265-volt sub-bases
- For use on 15, 20, and 30-amp applications

ZONELINE® ACCESSORIES POWER CORDS/CONNECTIONS (FOR AZ45-65 SERIES)



RAK315P/320P/330P[†]

RAK320P shown

230/208-VOLT UNIVERSAL POWER CORD KIT

- Six-foot power cord with LCDI
- 4-pin connector
- Low-voltage personality plug on 20 amp and 30 amp kits

Kit No.	Volts	Heater Wattage	Circuit Ampacity	
RAK315P	230/208	2.4/1.96 kw	15	
RAK320P	230/208	3.4/2.8 kw	20	
RAK330P	230/208	4.8/3.99 kw	30	



RAK315SP/320SP/330SP[†]

RAK315SP shown

230/208-VOLT UNIVERSAL SHORT POWER CORD KIT

- Three-foot power cord **WITHOUT LCDI**
- 4-pin connector
- Low-voltage personality plug on 20 amp and 30 amp kits
- Only for use in 230/208 volt sub-bases with new AZ45/65 units
- Requires the purchase of RAK4002D junction box

Kit No.	Volts	Heater Wattage	Circuit Ampacity	
RAK315SP	230/208	2.4/1.96 kw	15	
RAK320SP	230/208	3.4/2.8 kw	20	
RAK330SP	230/208	4.8/3.99 kw	30	



RAK515P/520P/530P[†]

RAK520P shown

265 VOLTS UNIVERSAL POWER SUPPLY

- Three-foot power cord **WITHOUT LCDI**
- 4-pin connector
- Low-voltage personality plug on 20 amp and 30 amp kits
- Only for use in 265 volt sub-bases with new AZ45/65 units

Kit No.	Volts	Heater Wattage	Circuit Ampacity	
RAK515P	265	2.4 kw	15	
RAK520P	265	3.4 kw	20	
RAK530P	265	4.8 kw	30	



RAK315D/320D/330D[†]

RAK320D shown

230/208-VOLT DIRECT CONNECT POWER SUPPLY KIT

- 4-pin connector with three 7" 12-gauge conductor wires and low-voltage personality plug on 20 amp and 30 amp kits
- Requires the purchase of RAK4002D junction box

Kit No.	Volts	Heater Wattage	Circuit Ampacity
RAK315D	230/208	2.4/1.99 kw	15
RAK320D	230/208	3.4/2.8 kw	20
RAK330D	230/208	4.8/3.99 kw	30



RAK515D/520D/530D[†]

RAK520D shown

265-VOLT UNIVERSAL DIRECT CONNECT POWER SUPPLY KIT

- 4-pin connector with three 7" 12-gauge conductor wires and low-voltage personality plug on 20 amp and 30 amp kits



Kit No.	Volts	Heater Wattage	Circuit Ampacity
RAK515D	265	2.4 kw	15
RAK520D	265	3.4 kw	20
RAK530D	265	4.8 kw	30

[†]Heater wattage may vary slightly among models. 30-amp heater wattage is reduced in low fan operation.

RAK4002D

DIRECT-CONNECT JUNCTION BOX WIRING (230/208 & 265 VOLTS)

- Kit for direct connection of 230/208-volt and 265-volt units to building power supply (via sub base or direct connect)
- Junction box is included on 265-volt units
- Used on models ending in W5 or higher (made after April 2019)



RAK13

MERV 13 MAKEUP AIR FILTER KIT


- When required by code for Makeup Air Products (California 01-01-2020)
- Includes one filter
- Replacement filter RAA13 sold separately



RAA64

REPLACEMENT FILTERS

- One pair per box
- Sold in pairs
- Conveniently accessible through the front of the unit



RAKCDC

CDC WIRING CONNECTOR

- 3-wire connector
- Works with Central Desk Control system and through wall fan option
- External fan option
- For use with DBM/EBM Makeup Air units and approved occupancy sensing thermostats



SHCM10PK

SmartHQ™ HOME CONNECT MODULE - 10 PACK

- Single module shown — sold in packs of 10
- Connects to unit and uses local non-captive Wi-Fi network.
- Provides individual remote control or Remote fleet management through SmartHQ management
- Allows for site error notifications
- Receive and install software updates

For full features visit www.smarthqsolutions.com



ZONELINE® THERMOSTATS



RAK149F2

- Two fan speed Dual use Digital thermostat
- Can be set up for Single or Two stage heat (AZ45 or AZ65)
- 24V AC wired remote wall thermostat
- Heat pump configured as default
- Requires 6-wire hookup for single stage heat and 7-wires for two stage heat



RAK149P2

- Programmable Dual use Digital thermostat
- Can be set up for Single or Two stage heat (AZ45 or AZ65)
- Programmable for 7-day or 5+2-day programs
- 24V AC wired remote wall thermostat
- Heat pump configured as default
- Requires 5-wire hookup for single stage heat and 6-wires for two stage heat



RAK180W1

ENERGY MANAGEMENT OCCUPANCY SENSING WIRED/WIRELESS THERMOSTAT MAKEUP AIR COMPATIBLE


- 2-wire power connection available (all other signals wireless)
- Thermostat (shown) and control card (mounts under Zoneline cover) included
- Control card works off 24 Volt AC or DC signal from unit
- Works with single-stage cooling and single-stage or two-stage heating systems with proper set up. Default is two stage heating and B type heat pump
- Extra 24V relay for controlling GE Zoneline Makeup Air duct door when room is unoccupied for additional energy savings
- Output may be programmed to control other room systems such as lighting, vents, etc.



RAK160W2

WIRELESS THERMOSTAT WITH TWO FAN SPEEDS

- 2-wire power connection optional (all other signals are wireless)
- Thermostat (shown) – Also comes with control card that mounts on unit.
- Works off 24 Volt AC signal from unit
- Works with single stage cooling and either signal stage or two-stage heating. Default is two-stage heating and B-type heat pump

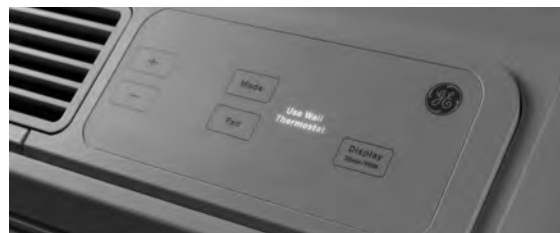

WALL THERMOSTAT

When installed with a remote Thermostat, the PTAC special feature display illuminates automatically a message (Use Wall Thermostat). The LED will dim down after a few seconds and then turn off after a few minutes as to not disturb the guest in a dark room.


Additional thermostat options are available for specialty lighting and energy management applications. Contact your GEA rep for more details.

RETROFIT KITS FOR OLDER ZONELINES

- Cut-off Assembly with LED module
- Main board with additional relay & software
- Junction box with power supply & status LED light
- Plug and play harnesses
- Ground Wire

PTAC IEQ Kit Offerings:

RAKUV1 (compatible for 230/208V models) and **RAKUV2** (compatible with 265V models) are available for order. These kits are customized to retrofit your Zoneline® PTAC (Z45/65 **only W5 and higher**). The IEQ kits are specifically designed for our Zoneline PTACs and do not void the warranty of your PTAC after installation. Average 93.9% reduction of airborne viruses within 180 minutes.*

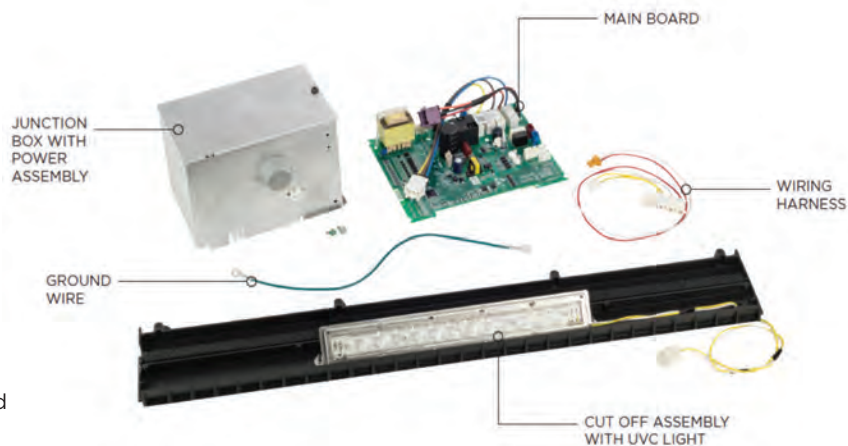

	RAKUV1	RAKUV2
Power	10 Watts	10 Watts
Voltage	208/230V	265V
Description Kits	UV-C LED kit for AZ45/65	UV-C LED kit for AZ45/65
Module	12 cluster of 4 LED's	12 cluster of 4 LED's
SmartHQ Capable	YES	YES
Warranty	1 Year, Parts only	1 Year, Parts only

NUMBER	DESCRIPTION
RAA62	Replacement filters for AZ models (10 pairs per box) for 22, 32 & 52 only
RAA62A	Replacement filters (10 pairs per box) for 25, 35 & 55 only
RAA63	Replacement filters (10 pairs per box) for 28, 38, 41, 58, & 61 only
RAA64	Replacement filters (one pair per box) for 45 & 65 only (while supplies last). Will be available from Parts - WP85X20858
RAB78B	SMC four piece Quick Snap wall sleeve
RAB81	Wall Sleeve-ships flat- 4 piece snap together 42x16x13 3/4
RAB81B	Wall Sleeve-fully assembled 4 piece snap together 42x16x13 3/4
RAB8116B	Quick Snap Wall Sleeve 16" extended depth
RAB8118B	Quick Snap Wall Sleeve 18" extended depth
RAB8120B	Quick Snap Wall Sleeve 20" extended depth
RAB8124B	Quick Snap Wall Sleeve 24" extended depth
RAD10	Internal/external drain kit
RAF452	Replacement room cabinet (2-position louvers) for 22, 32 & 52 only
RAF452A	Replacement room cabinet (2-position louvers) for 25, 35 & 55 only
RAF453A	Replacement room cabinet (2-position louvers) for 28, 29, 38, 39, 41, 58 and 61 only
RAF454	Replacement room cabinet (2-position louvers) for 45 & 65 only
RAG60	Stamped aluminum exterior rear grille
RAG61	Architectural rear grille, beige
RAG62	Architectural rear grille, maple
RAG63	Architectural rear grille, dark brown
RAG67	Aluminum architectural outdoor grille
RAK40	Air deflector kit
RAK44	PTAC Curtain Guard (5 Pack)
RAK4002A	Direct-connect junction box 230/208V for 25, 35, 28, 29, 38, 39, 41, 45, 61 & 65 only
RAK4002B	Direct-connect junction box 230/208V for 55, 58 only
RAK4002C	Direct-connect junction box, 230/208V and 265V for 45 & 65 Models ending in W4 or lower
RAK4002CW	Direct-connect junction box wiring, 230/208V and 265V (excludes 45 & 65)
RAK4002D	Direct-connect junction box 230/208V for 45 & 65 models ending in W5 or higher

*GE Appliances tested a Phi-X174 bacteriophage virus, nebulized in a sealed test chamber (10' x 10' x 10' (1000 ft 3)) with an average temperature of 68° F and relative humidity of 50.3%. Air sampling was taken every 30 minutes with the Zoneline PTAC on high speed with a new UVC kit active over 3 hours & compared to natural decay results. Testing was conducted at a nationally accredited laboratory.

NUMBER	DESCRIPTION
RAK315P	Universal power supply, 15 amp for 45 & 65 only with 6' power cord
RAK320P	Universal power supply, 20 amp for 45 & 65 only with 6' power cord
RAK330P	Universal power supply, 30 amp for 45 & 65 only with 6' power cord
RAK315D	230/208V Universal power supply, 15 amp for 45 & 65 only
RAK320D	230/208V Universal power supply, 20 amp for 45 & 65 only
RAK330D	230/208V Universal power supply, 30 amp for 45 & 65 only
RAK515D	265V Universal power supply, short 15 amp for 45 & 65 only
RAK520D	265V Universal power supply, short 20 amp for 45 & 65 only
RAK530D	265V Universal power supply, short 30 amp for 45 & 65 only
RAK315SP	230/208V Universal power supply, short, 15 amp for 45 & 65 only, 3' cord for sub-base use only
RAK320SP	230/208V Universal power supply, short, 20 amp for 45 & 65 only, 3' cord for sub-base use only
RAK330SP	230/208V Universal power supply, short, 30 amp for 45 & 65 only, 3' cord for sub-base use only
RAK515P	265V Universal power supply, 15 amp for 45 & 65 only, 3' cord for sub-base use only
RAK520P	265V Universal power supply, 20 amp for 45 & 65 only, 3' cord for sub-base use only
RAK530P	265V Universal power supply, 30 amp for 45 & 65 only, 3' cord for sub-base use only
RAK205CW	Chaseway for RAK204U sub-base
RAK204D15C	230/208V, 15 amp sub-base with power cord, 45 & 65 only
RAK204D20C	230/208V, 20 amp sub-base with power cord, 45 & 65 only
RAK204D30C	230/208V, 30 amp sub-base with power cord, 45 & 65 only
RAK204E15C	265V, 15 amp sub-base with power cord, 45 & 65 only
RAK204E20C	265V, 20 amp sub-base with power cord, 45 & 65 only
RAK204E30C	265V, 30 amp sub-base with power cord, 45 & 65 only
RAK204U	Sub-base without electrical devices or wiring
RAK601B	Duct extension for 45 & 65 only (Includes RAK602B)
RAK602B	Air register and trim flange for 45 & 65 only
RAK6052	Duct adapter for 22, 32, 25, 35, 28, 29, 38, 39, 41 & 61 only (Color prior to AZ45/65 Series)
RAK6053	Duct adapter for new installations 45 & 65 only
RAK7013	Duct adapter AZ45/65 with existing ductwork measuring 8 3/8" H x 6 1/2" W
RAK7023	Duct transition for replacement of new units and existing ductwork measuring 7 3/32" x 6 1/2" W for 45 & 65 only
RAK8023	Locking door kit for 28, 29, 38, 39, 41, 58 & 61 only
RAK806	Universal cover label (10 covers per kit), excludes 45 & 65
RAK901L	Wall case insulation kit (While supplies last)
RAKCDC	CDC Wiring Connector for 45 & 65 only (Also used with occupancy thermostats for Makeup Air)
RAA13	Replacement filter for RAK13
RAK13	MERV 13 filter kit for Makeup Air models (California 1-1-2020)
RAKUVC1	Add on 230/208 volt UVC retrofit kit for AZ45/65 series ending in W5 or higher
RAKUVC2	Add on 265 volt UVC retrofit kit for AZ45/65 series ending in W5 or higher
SHCM10PK	SmartHQ™ Home Connect Module (10 pack)

THERMOSTATS

NUMBER	DESCRIPTION
RAK149F2	Single stage and two stage digital 2 fan speed remote thermostat
RAK149P2	Single stage and two stage programmable remote thermostat
RAK160W2	Wireless two fan speed thermostat
RAK180W1	Energy management/occupancy sensing wireless thermostat – Makeup Air compatible

ZONELINE® WARRANTY

FOR THE PERIOD OF | GE APPLIANCES WILL REPLACE

ONE YEAR

From the date of the original purchase

Any part of the air conditioner which fails due to a defect in materials or workmanship. During this limited one-year warranty, GE will provide, free of charge, all labor and related service costs to replace the defective part.

FIVE YEARS

From the date of the original purchase


Sealed Refrigerating System - if any part of the Sealed Refrigerating System (the compressor, condenser, evaporator, and all connecting tubing, including the makeup air system) should fail due to a defect in materials or workmanship. During this limited five-year warranty, GE will provide, free of charge, all labor and related service costs to replace the defective part.

SECOND THROUGH FIFTH YEAR

From the date of the original purchase

Fan Motors, Switches, Heater, Heater Protectors, Compressor Overload, Solenoids, Circuit Boards, Auxiliary Controls, Thermistors, Freeze Sentinel, Frost Controls, ICR Pump, Capacitors, Varistors and Indoor Blower Bearing, if any of these parts should fail due to a defect in materials or workmanship. During this additional four-year limited warranty, GE will provide the replacement part free of charge. The customer will be responsible for any labor and related service costs.

ZONELINE® CHASSIS NOMENCLATURE

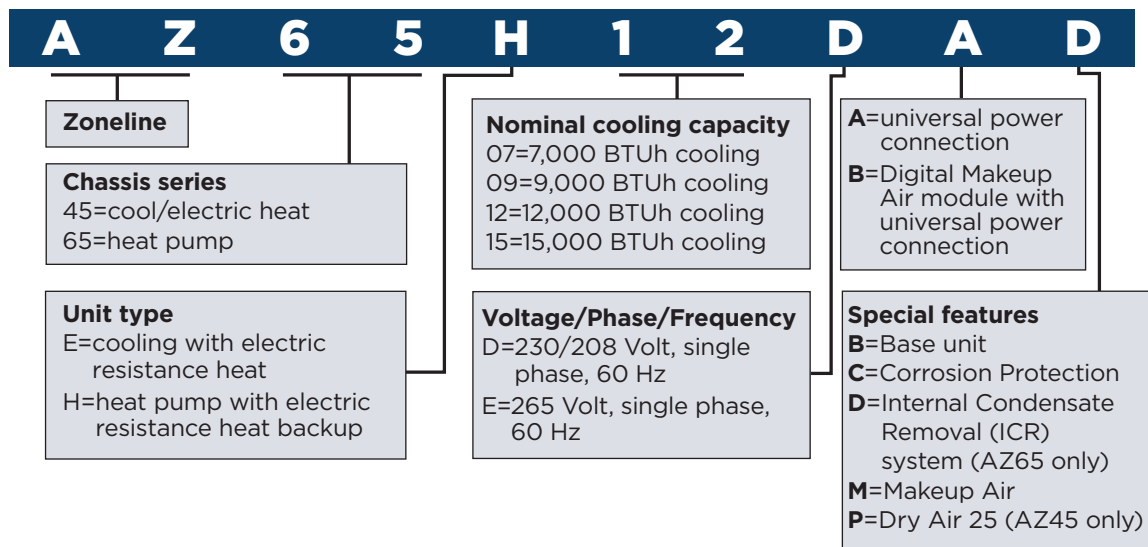

Listed by
Underwriters
Laboratories

